

→ Series 455



■ MATERIAL



■ SPECIFICATION



DN 15 to DN 100    -60°C to +400°C  
depending on version    0,2 – 40 bar

■ SUITABLE FOR

|                        |                         |  |
|------------------------|-------------------------|--|
| Liquids                | neutral and non-neutral |  |
| Air, gases and vapours | neutral and non-neutral |  |
| Steam                  |                         |  |

■ EXAMPLES OF USE

Full-lift safety valve for the protection of:

- pressure tanks and -systems for neutral / non-neutral vapours and gases
- Steam plants

Normal safety valve for the protection of:

- pressure tanks and -systems for neutral / non-neutral liquids

Please observe plant-specific regulations and use of appropriate valve version and sealing material.

- Chemical and petrochemical plants
- biogas plants
- industrial- and commercial boiler plants
- Production and processing of industrial gases
- shipbuilding industry and marine equipment
- secondary areas in the food-, beverage-, pharmaceutical- and cosmetics-industries

Safety valves are set and sealed at the factory.

■ APPROVALS

|  |  |
|--|--|
| TÜV-Type test approval 2094  | D/G (full-lift), F (normal)                  |
| EU type examination  | S/G, L                                       |
| TR ZU 032/2013 - TR ZU 010/2011  | D/G (S/G), F (L)                             |
| <b>Requirements</b>  |  |
| PED 2014/68/EU<br>DIN EN ISO 4126-1<br>AD 2000 Data sheet A2<br>VdTÜV Guideline SV 100 | TRD 421 and DIN EN 12952-7<br>DIN EN 12953-8 |

|                                       |      |
|---------------------------------------|------|
| <b>Classification society</b>         |      |
| DNV                                   | DNV  |
| American Bureau of Shipping           | ABS  |
| Bureau Veritas                        | BV   |
| Russian Maritime Register of Shipping | RMS  |
| Registro Italiano Navale              | RINA |

■ MATERIALS

| Component               | Material        | DIN EN | ASME   |
|-------------------------|-----------------|--------|--------|
| Body and spring housing | Stainless steel | 1.4408 | CF8M   |
| Valve seat              | Stainless steel | 1.4404 | 316 L  |
| Internal parts          | Stainless steel | 1.4404 | 316 L  |
| Spring                  | Stainless steel | 1.4310 | 302    |
| Bellows (optional)      | Stainless steel | 1.4571 | 316 Ti |

Series 455 ■ VALVE VERSION

|           |  |  |
|-----------|--|--|
| <b>s</b>  | non-gastight, open spring housing                                | for neutral media, no liquids, without counter pressure  |
| <b>b</b>  | with bellows, non-gastight version of spring housing (10mm bore) | for neutral and non-neutral media and/or counter pressure <sup>1</sup> . Spring, moving parts and the environment are protected from being affected by the medium.   |
| <b>t</b>  | gastight version of spring housing                               | for neutral and non-neutral media without counter pressure. The environment is protected from being affected by the medium.  |
| <b>tb</b> | gastight version with bellows                                    | for neutral and non-neutral and particularly for flammable, toxic and environmentally hazardous media and/or counter pressure <sup>1</sup> . Spring, moving parts and the environment are protected from being affected by the medium. <b>Double gastight.</b> |

<sup>1</sup> up to max. 30% of the response pressure

■ MEDIUM

|           |                    |  |
|-----------|--------------------|--|
| <b>G</b>  | gaseous            | Air, vapours, gases and steam          |
| <b>GF</b> | gaseous and liquid | Air, vapours, gases, steam and liquids |

■ TYPE OF LIFTING MECHANISM

|          |                             |
|----------|-----------------------------|
| <b>L</b> | Standard with lifting lever |
| <b>0</b> | without lifting device      |

■ AVAILABLE NOMINAL DIAMETERS AND CONNECTION SIZES

| Nominal diameter DN | 15  | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 |
|---------------------|-----|----|----|----|----|----|----|----|-----|
| <b>Inlet</b>        | 15  | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 |
| <b>Outlet</b>       | 25  | ■  |    |    |    |    |    |    |     |
|                     | 32  |    | ■  |    |    |    |    |    |     |
|                     | 40  |    |    | ■  |    |    |    |    |     |
|                     | 50  |    |    |    | ■  |    |    |    |     |
|                     | 65  |    |    |    |    | ■  |    |    |     |
|                     | 80  |    |    |    |    |    | ■  |    |     |
|                     | 100 |    |    |    |    |    |    | ■  |     |
|                     | 150 |    |    |    |    |    |    |    | ■   |

■ CONNECTION TYPE INLET / OUTLET FLANGE CONNECTIONS

|                |          |                                       |                           |
|----------------|----------|---------------------------------------|---------------------------|
| <b>FL / FL</b> | Standard | Flange connection / flange connection | DIN EN 1092 / DIN EN 1092 |
|----------------|----------|---------------------------------------|---------------------------|

■ SEALS

|                         |                          |           |                 |
|-------------------------|--------------------------|-----------|-----------------|
| <b>MD</b>               | Metal-to-metal sealing   | Flat seal | -60°C to +400°C |
| <b>EPDM</b>             | Ethylene propylene diene | Flat seal | -40°C to +170°C |
| <b>FKM</b>              | Fluorocarbon             | Flat seal | -20°C to +200°C |
| <b>FFKM<sup>2</sup></b> | Perfluorinated rubber    | Flat seal | -10°C to +260°C |
| <b>PTFE<sup>3</sup></b> | Polytetrafluoroethylene  | Flat seal | -60°C to +225°C |

Auxiliary seals are made of highly resistant, adhesive-free graphite/stainless steel foil. Top cap with O-rings in EPDM.

<sup>2</sup> Standard Kalrez® 6375, alternatively Kalrez® 6230 with FDA, USP, 3-A

<sup>3</sup> up to 10bar TFM 1600, from 10bar TFM 4215

■ NOMINAL DIAMETERS, CONNECTIONS, INSTALLATION DIMENSIONS

| Series 455: Connection, installation dimensions, ranges of adjustment |  |           |            |            |            |            |            |                             |                               |                             |            |
|---|--|-----------|------------|------------|------------|------------|------------|-----------------------------|-------------------------------|-----------------------------|------------|
| Nominal diameter  | DN                                     | 15        | 20         | 25         | 32         | 40         | 50         | 65                          | 80                            | 100                         |            |
| Connection DIN EN 1092-1  | DN / PN                                | 15 / 40   | 20 / 40    | 25 / 40    | 32 / 40    | 40 / 40    | 50 / 40    | 65 / 40                     | 80 / 40                       | 100 / 40                    |            |
| Outlet DIN EN 1092-1  | DN1 / PN                               | 25 / 16   | 32 / 16    | 40 / 16    | 50 / 16    | 65 / 16    | 80 / 16    | 100 / 16                    | 125 / 16                      | 150 / 16                    |            |
| Installation dimensions in mm   | L                                      | 80        | 95         | 100        | 110        | 115        | 120        | 140                         | 160                           | 180                         |            |
|   | h                                      | 90        | 85         | 105        | 115        | 140        | 150        | 170                         | 195                           | 220                         |            |
|   | D                                      | 95        | 105        | 115        | 140        | 150        | 165        | 185                         | 200                           | 235                         |            |
|   | K / nxd                                | 65 / 4x14 | 75 / 4x14  | 85 / 4x14  | 100 / 4x18 | 110 / 4x18 | 125 / 4x18 | 145 / 8x18                  | 160 / 8x18                    | 180 / 8x18                  | 190 / 8x22 |
|   | D1                                     | 115       | 140        | 150        | 165        | 185        | 200        | 220                         | 250                           | 285                         |            |
|   | K1 / n1xd1                             | 85 / 4x14 | 100 / 4x18 | 110 / 4x18 | 125 / 4x18 | 145 / 8x18 | 160 / 8x18 | 180 / 8x18                  | 210 / 8x18                    | 240 / 8x22                  |            |
|   | H / H1 <sup>1</sup>                    | 167 / 207 | 165 / 205  | 190 / 230  | 260 / 300  | 302 / 330  | 352 / 392  | 427 / 462                   | 486 / 530                     | 577 / 624                   |            |
|   | H2 <sup>2</sup> / H3 <sup>3</sup>      | 206 / 246 | 204 / 244  | 229 / 269  | 321 / 361  | 363 / 391  | 413 / 453  | 497 / 532                   | 556 / 600                     | 647 / 694                   |            |
|   | Lmax                                   | 75        | 85         | 95         | 120        | 130        | 160        | 205                         | 215                           | 255                         |            |
|   | A02                                    | 1/8"      | 1/8"       | 1/4"       | 1/4"       | 1/2"       | 1/2"       | 1/2"                        | 1/2"                          | 1/2"                        |            |
|   | $\alpha_w / K_{dr}$ (F)                | 0,49      | 0,54       | 0,54       | 0,54       | 0,54       | 0,54       | 0,54                        | 0,54                          | 0,54                        |            |
|   | $\alpha_w / K_{dr}$ (D/G) <sup>4</sup> | 0,72      | 0,74       | 0,74       | 0,74       | 0,74       | 0,74       | 0,74                        | 0,74                          | 0,74                        |            |
|   | Weight                                 | do        | 15,0       | 18,0       | 22,5       | 29,3       | 36,0       | 45,0                        | 59,0                          | 72,0                        | 90,0       |
| Weight  | kg <sup>5</sup>                        | 5,0       | 6,0        | 8,0        | 16,0       | 18,5       | 25,0       | 45,0                        | 57,5                          | 91,5                        |            |
|   | kg <sup>1,5</sup>                      | 5,5       | 6,5        | 8,5        | 18,5       | 20,5       | 27,5       | 49,0                        | 63,5                          | 100,5                       |            |
|   | kg <sup>2,5</sup>                      | 5,5       | 6,5        | 8,5        | 18,0       | 20,5       | 27,0       | 48,5                        | 61,0                          | 95,0                        |            |
|   | kg <sup>3,5</sup>                      | 6,0       | 7,0        | 9,0        | 20,0       | 22,5       | 29,5       | 52,0                        | 67,0                          | 104,0                       |            |
| Range of adjustment   | bar                                    | 0,2 - 40  | 0,2 - 40   | 0,2 - 40   | 0,2 - 40   | 0,2 - 40   | 0,2 - 40   | 0,2 - 24 (40 <sup>6</sup> ) | 0,2 - 25,5 (40 <sup>6</sup> ) | 0,2 - 20 (40 <sup>6</sup> ) |            |
| Pressure range with bellows   | bar                                    | 1,2 - 40  | 0,8 - 40   | 0,5 - 40   | 1,0 - 40   | 0,9 - 40   | 0,5 - 40   | 0,3 - 30 (40 <sup>6</sup> ) | 0,2 - 29 (40 <sup>6</sup> )   | 0,2 - 25 (40 <sup>6</sup> ) |            |

<sup>1</sup>Values for the version with bellows

<sup>2</sup>Values for the version with lifting lever


<sup>3</sup>Values for the version with bellows and lifting lever

<sup>4</sup>Flow coefficients for blow-off pressures < 3,0 bar: Please refer to the Flow Coefficients Chart.

<sup>5</sup>Details for version with gastight spring housing

<sup>6</sup>on request

■ MAIN DIMENSIONS, INSTALLATION DIMENSIONS

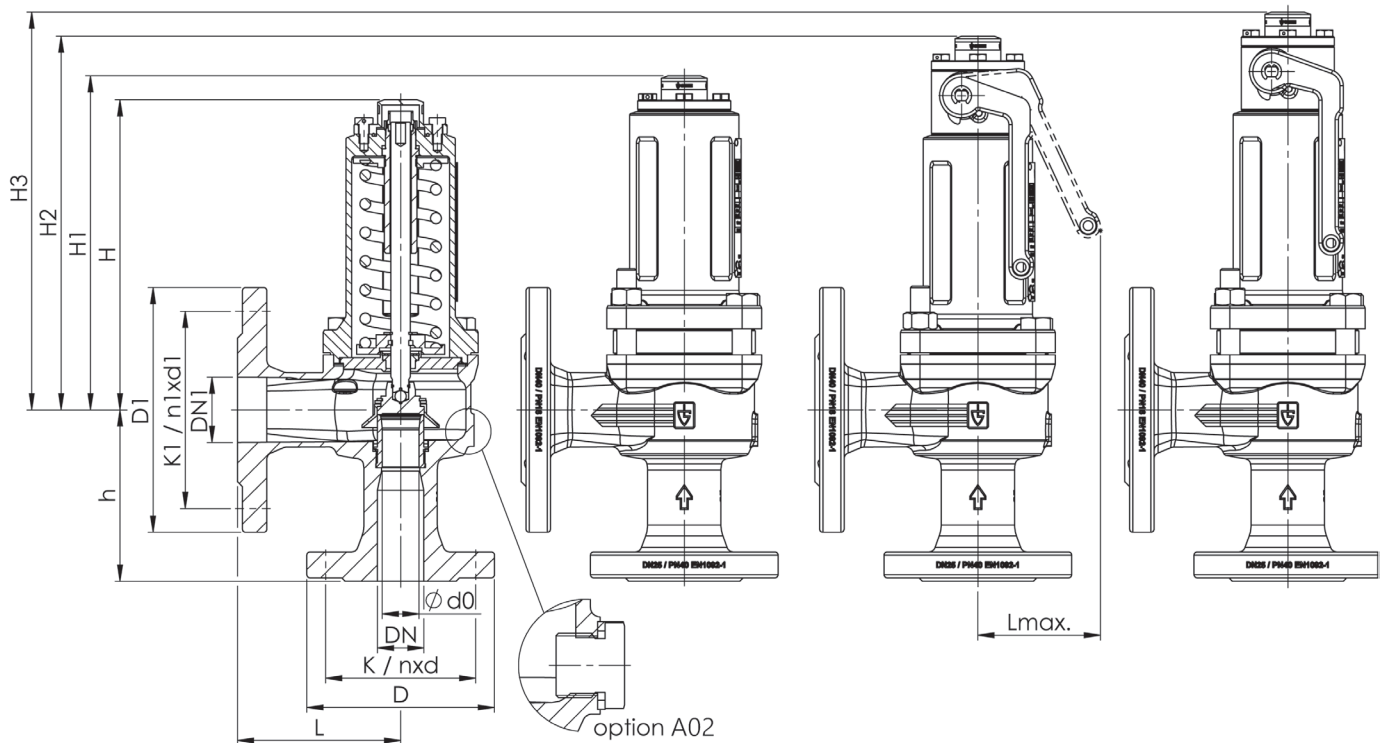

Series 455 ■ INDIVIDUAL SELECTION / VALVE CONFIGURATION

| Series | Valve version | Medium | Lifting device | Nominal diameter DN | Connection type |        | Connection size |        | Seal | Options | Set pressure | Quantity |
|--------|---------------|--------|----------------|---------------------|-----------------|--------|-----------------|--------|------|---------|--------------|----------|
|        |               |        |                |                     | Inlet           | Outlet | Inlet           | Outlet |      |         |              |          |
| 455    | t             | GF     | L              | 50                  | FL              | FL     | 50              | 80     | MD   | S62     | 10,0         | 1        |
| 455    |               |        |                |                     | FL              | FL     |                 |        |      |         |              |          |
| 455    |               |        |                |                     | FL              | FL     |                 |        |      |         |              |          |
| 455    |               |        |                |                     | FL              | FL     |                 |        |      |         |              |          |

■ TECHNICAL FINISHES, VARIANTS, ACCESSORIES

|            |  |                          |            |   |                          |
|------------|--|--------------------------|------------|---|--------------------------|
| <b>S60</b> | Pressure sensor connection M5 or G1/4 for monitoring the springhousing (only for valves with bellow)   | <input type="checkbox"/> | <b>A01</b> | Gagging screw for tests of valve tightness and resistance to pressure with the fitted valve | <input type="checkbox"/> |
| <b>S62</b> | Inductive proximity sensor, assembled, for indication of valve position, including connection cable 5m | <input type="checkbox"/> | <b>A02</b> | Connection for condensate in the outlet body  | <input type="checkbox"/> |
|            |  | <input type="checkbox"/> | <b>A07</b> | Stroke limitation   | <input type="checkbox"/> |

■ PROPERTIES

|            |  |                          |  |  |                          |
|------------|--|--------------------------|--|--|--------------------------|
| <b>GOX</b> | Especially for gaseous O2 applications by employment of specific materials including oil- and grease free production process | <input type="checkbox"/> |  |  | <input type="checkbox"/> |
| <b>P01</b> | Oil- and grease-free production  | <input type="checkbox"/> |  |  | <input type="checkbox"/> |
|            |  | <input type="checkbox"/> |  |  | <input type="checkbox"/> |

■ CERTIFICATES / APPROVALS

|            |  |                          |            |   |                          |
|------------|--|--------------------------|------------|---|--------------------------|
| <b>C01</b> | Factory certificate acc. DIN EN 10204 2.2 (WKZ 2.2)  | <input type="checkbox"/> | <b>C06</b> | ATEX evaluation acc. to 2014/34/EU  | <input type="checkbox"/> |
| <b>C02</b> | Test certificate acc. DIN EN 10204 3.1 (WPZ 3.1)   | <input type="checkbox"/> | <b>C07</b> | SIL evaluation relating to IEC 61508-2  | <input type="checkbox"/> |
| <b>C03</b> | Material test certificate acc. DIN EN 10204 3.1 (MPZ 3.1) (pressure retaining part)  | <input type="checkbox"/> | <b>C09</b> | Seat tightness test with helium, leak detection method under vacuum incl. Factory Inspection Certificate 3.1 acc. to DIN EN 10204 | <input type="checkbox"/> |
| <b>C04</b> | TÜV/DEKRA individual inspection acc. EN 10204 3.2 (TÜV/DEKRA-APZ)  | <input type="checkbox"/> | <b>C10</b> | Certificate of oil- and grease free production  | <input type="checkbox"/> |
| <b>C05</b> | Sealing material<br>Manufacturer certification (FDA, USP 3, 3-A,...),<br>Please indicate description of certificate: _____ | <input type="checkbox"/> | <b>C11</b> | Certification of the production process especially for gaseous oxygen applications by employment of specific materials            | <input type="checkbox"/> |

■ ADMISSIONS / ACCREDITATIONS

|            |  |                          |            |  |                          |
|------------|--|--------------------------|------------|--|--------------------------|
| <b>AA1</b> | EC Type examination acc. to Directive 2014/68/EU   | <input type="checkbox"/> | <b>AK1</b> | Det Norske Veritas (DNV) type approval   | <input type="checkbox"/> |
| <b>AA2</b> | TÜV component test acc. to VdTÜV specification sheet SV 100                              | <input type="checkbox"/> | <b>AK3</b> | American Bureau of Shipping (ABS) type approval                                  | <input type="checkbox"/> |
| <b>AA4</b> | EAC - certificate/declaration with passport for the valve and laser marking of the valve | <input type="checkbox"/> | <b>AK4</b> | Bureau Veritas (BV) type approval  | <input type="checkbox"/> |
|            |  | <input type="checkbox"/> | <b>AK6</b> | Registro Italiano Navale (RINA) type approval                                    | <input type="checkbox"/> |
|            |  | <input type="checkbox"/> | <b>AL</b>  | Individual inspection by notified body inspector – (body to be indicated): _____ | <input type="checkbox"/> |

■ ENQUIRY

Copy and send to: [order@goetze-armaturen.de](mailto:order@goetze-armaturen.de).

Order form easily to be found online under the section for each series.





| Series 455: Blowing-off rates at 5% above set pressure |                    |            |        |            |        |              |         |              |         |            |         |
|--|--------------------|------------|--------|------------|--------|--------------|---------|--------------|---------|------------|---------|
| Nominal diameter DN                                    |                    | 15         |        | 20         |        | 25           |         | 32           |         | 40         |         |
|  |                    | d0 = 15 mm |        | d0 = 18 mm |        | d0 = 22,5 mm |         | d0 = 29,3 mm |         | d0 = 36 mm |         |
| Set pressure bar                                       |                    | I          | II     | I          | II     | I            | II      | I            | II      | I          | II      |
| Air I  | 0,2                | 71,7       | 60,5   | 118,1      | 99,6   | 184,5        | 155,6   | 312,9        | 263,8   | 472,4      | 398,2   |
|  | 0,5                | 112,6      | 91,9   | 173,6      | 141,6  | 271,3        | 221,3   | 460,0        | 375,2   | 694,4      | 566,5   |
|  | Nm <sup>3</sup> /h | 1          | 167,1  | 133,1      | 250,0  | 199,1        | 390,5   | 311,1        | 662,3   | 527,5      | 999,8   |
| Steam II<br>(kg/h <sup>1)</sup> )                      | 1,5                | 220,3      | 174,4  | 322,5      | 255,3  | 503,9        | 398,9   | 854,6        | 676,4   | 1290,1     | 1021,1  |
|  | 2                  | 269,3      | 211,9  | 391,2      | 307,8  | 611,2        | 480,9   | 1036,5       | 815,5   | 1564,7     | 1231,1  |
|  | 2,5                | 315,0      | 246,6  | 462,5      | 362,2  | 722,7        | 565,9   | 1225,5       | 959,6   | 1850,1     | 1448,6  |
|  | 3                  | 360,7      | 281,2  | 533,9      | 416,2  | 834,2        | 650,3   | 1414,7       | 1102,7  | 2135,6     | 1664,7  |
|  | 3,5                | 406,5      | 315,7  | 601,6      | 467,2  | 940,1        | 730,1   | 1594,2       | 1238,0  | 2406,6     | 1869,0  |
|  | 4                  | 452,3      | 350,1  | 669,4      | 518,1  | 1046,0       | 809,5   | 1773,8       | 1372,8  | 2677,8     | 2072,4  |
|  | 4,5                | 498,2      | 384,3  | 737,3      | 568,8  | 1152,0       | 888,8   | 1953,6       | 1507,2  | 2949,2     | 2275,3  |
|  | 5                  | 544,0      | 418,5  | 805,2      | 619,4  | 1258,1       | 967,9   | 2133,5       | 1641,3  | 3220,8     | 2477,7  |
|  | 5,5                | 589,9      | 452,7  | 873,1      | 670,0  | 1364,3       | 1046,8  | 2313,5       | 1775,2  | 3492,5     | 2679,9  |
|  | 6                  | 635,9      | 486,8  | 941,1      | 720,4  | 1470,5       | 1125,7  | 2493,6       | 1908,9  | 3764,5     | 2881,7  |
|  | 6,5                | 681,9      | 520,8  | 1009,2     | 770,8  | 1576,8       | 1204,3  | 2673,9       | 2042,2  | 4036,6     | 3083,0  |
|  | 7                  | 727,9      | 554,8  | 1077,2     | 821,0  | 1683,2       | 1282,9  | 2854,3       | 2175,5  | 4308,9     | 3284,1  |
|  | 7,5                | 773,9      | 588,7  | 1145,4     | 871,2  | 1789,6       | 1361,3  | 3034,8       | 2308,4  | 4581,5     | 3484,9  |
|  | 8                  | 820,0      | 622,6  | 1213,5     | 921,4  | 1896,2       | 1439,8  | 3215,5       | 2441,5  | 4854,2     | 3685,8  |
|  | 8,5                | 866,1      | 656,5  | 1281,8     | 971,6  | 2002,8       | 1518,1  | 3396,3       | 2574,3  | 5127,1     | 3886,3  |
|  | 9                  | 912,2      | 690,4  | 1350,0     | 1021,8 | 2109,5       | 1596,6  | 3577,2       | 2707,5  | 5400,2     | 4087,3  |
|  | 9,5                | 958,4      | 724,3  | 1418,4     | 1072,0 | 2216,2       | 1675,0  | 3758,2       | 2840,4  | 5673,5     | 4287,9  |
|  | 10                 | 1004,6     | 758,1  | 1486,7     | 1122,0 | 2323,0       | 1753,2  | 3939,4       | 2973,0  | 5947,0     | 4488,1  |
|  | 11                 | 1097,0     | 825,6  | 1623,6     | 1221,8 | 2536,9       | 1909,1  | 4302,1       | 3237,4  | 6494,5     | 4887,3  |
|  | 12                 | 1189,7     | 893,0  | 1760,7     | 1321,6 | 2751,1       | 2065,0  | 4665,3       | 3501,8  | 7042,9     | 5286,4  |
|  | 13                 | 1282,4     | 960,3  | 1898,0     | 1421,3 | 2965,6       | 2220,8  | 5029,1       | 3766,0  | 7592,0     | 5685,3  |
|  | 14                 | 1375,3     | 1027,9 | 2035,5     | 1521,3 | 3180,4       | 2377,0  | 5393,3       | 4030,8  | 8141,9     | 6085,0  |
|  | 15                 | 1468,4     | 1095,4 | 2173,2     | 1621,3 | 3395,6       | 2533,2  | 5758,1       | 4295,8  | 8692,6     | 6485,0  |
|  | 16                 | 1561,5     | 1162,4 | 2311,0     | 1720,3 | 3611,0       | 2688,0  | 6123,4       | 4558,3  | 9244,1     | 6881,3  |
|  | 17                 | 1654,8     | 1230,0 | 2449,1     | 1820,4 | 3826,7       | 2844,4  | 6489,3       | 4823,6  | 9796,4     | 7281,8  |
|  | 18                 | 1748,2     | 1297,2 | 2587,4     | 1919,9 | 4042,8       | 2999,9  | 6855,7       | 5087,2  | 10349,5    | 7679,7  |
|  | 19                 | 1841,8     | 1364,2 | 2725,8     | 2019,1 | 4259,1       | 3154,8  | 7222,5       | 5349,8  | 10903,3    | 8076,2  |
|  | 20                 | 1935,5     | 1431,8 | 2864,5     | 2119,1 | 4475,8       | 3311,0  | 7590,0       | 5614,8  | 11458,1    | 8476,2  |
|  | 21                 | 2029,3     | 1499,3 | 3003,4     | 2219,0 | 4692,8       | 3467,2  | 7957,9       | 5879,6  | 12013,5    | 8876,0  |
|  | 22                 | 2123,3     | 1566,8 | 3142,5     | 2318,8 | 4910,1       | 3623,2  | 8326,4       | 6144,1  | 12569,8    | 9275,4  |
|  | 23                 | 2217,4     | 1634,2 | 3281,7     | 2418,6 | 5127,7       | 3779,0  | 8695,5       | 6408,4  | 13127,0    | 9674,3  |
|  | 24                 | 2311,6     | 1701,5 | 3421,2     | 2518,2 | 5345,6       | 3934,7  | 9065,0       | 6672,4  | 13684,7    | 10072,8 |
|  | 25                 | 2406,0     | 1768,7 | 3560,9     | 2617,7 | 5563,9       | 4090,2  | 9435,2       | 6936,0  | 14243,6    | 10470,8 |
|  | 26                 | 2500,5     | 1836,0 | 3700,8     | 2717,3 | 5782,5       | 4245,8  | 9805,8       | 7200,0  | 14803,1    | 10869,3 |
|  | 27                 | 2595,2     | 1903,6 | 3840,9     | 2817,4 | 6001,4       | 4402,2  | 10177,0      | 7465,1  | 15363,5    | 11269,6 |
| 28   | 2690,0             | 1971,2     | 3981,2 | 2917,4     | 6220,6 | 4558,4       | 10548,8 | 7730,1       | 15924,7 | 11669,6    |         |
| 29   | 2784,9             | 2038,8     | 4121,7 | 3017,4     | 6440,1 | 4714,6       | 10921,0 | 7995,0       | 16486,6 | 12069,5    |         |
| 30   | 2880,0             | 2106,3     | 4262,3 | 3117,3     | 6659,9 | 4870,7       | 11293,7 | 8259,7       | 17049,3 | 12469,1    |         |
| 32   | 3070,5             | 2241,5     | 4544,3 | 3317,4     | 7100,5 | 5183,5       | 12041,0 | 8790,1       | 18177,4 | 13269,7    |         |
| 34   | 3261,6             | 2377,5     | 4827,2 | 3518,8     | 7542,5 | 5498,1       | 12790,4 | 9323,6       | 19308,8 | 14075,1    |         |
| 36   | 3453,3             | 2513,6     | 5110,9 | 3720,1     | 7985,8 | 5812,7       | 13542,1 | 9857,1       | 20443,6 | 14880,5    |         |
| 38   | 3645,5             | 2649,9     | 5395,4 | 3921,8     | 8430,3 | 6127,9       | 14295,9 | 10391,5      | 21581,4 | 15687,3    |         |
| 40   | 3836,8             | 2786,5     | 5678,4 | 4124,1     | 8872,5 | 6443,9       | 15045,8 | 10927,4      | 22713,6 | 16496,3    |         |

<sup>1)</sup>Please observe the pressure-/temperature rating


| CONTINUATION - Series 455: Blowing-off rates at 5% above set pressure |     |            |         |            |         |            |         |            |          |
|---|-----|------------|---------|------------|---------|------------|---------|------------|----------|
| Nominal diameter DN   |     | 50         |         | 65         |         | 80         |         | 100        |          |
|   |     | d0 = 45 mm |         | d0 = 59 mm |         | d0 = 72 mm |         | d0 = 90 mm |          |
| Set pressure bar  |     | I          | II      | I          | II      | I          | II      | I          | II       |
| Air I   | 0,2 | 738,1      | 622,3   | 1268,7     | 1069,7  | 1889,5     | 1593,0  | 2952,3     | 2489,0   |
|   | 0,5 | 1085,0     | 885,1   | 1865,2     | 1521,5  | 2777,7     | 2265,9  | 4340,1     | 3540,4   |
| Nm <sup>2</sup> /h  | 1   | 1562,2     | 1244,3  | 2685,4     | 2138,9  | 3999,2     | 3185,3  | 6248,8     | 4977,0   |
|   | 1,5 | 2015,8     | 1595,5  | 3465,2     | 2742,6  | 5160,4     | 4084,4  | 8063,1     | 6381,9   |
| Steam II  | 2   | 2444,8     | 1923,6  | 4202,6     | 3306,6  | 6258,6     | 4924,3  | 9779,1     | 7694,3   |
|   | 2,5 | 2890,8     | 2263,5  | 4969,3     | 3891,0  | 7400,5     | 5794,6  | 11563,2    | 9054,0   |
| kg/h <sup>1)</sup>  | 3   | 3336,9     | 2601,0  | 5736,1     | 4471,2  | 8542,4     | 6658,6  | 13347,5    | 10404,1  |
|   | 3,5 | 3760,3     | 2920,3  | 6464,0     | 5020,0  | 9626,4     | 7475,9  | 15041,2    | 11681,1  |
|   | 4   | 4184,1     | 3238,1  | 7192,4     | 5566,3  | 10711,2    | 8289,5  | 16736,2    | 12952,3  |
|   | 4,5 | 4608,1     | 3555,1  | 7921,4     | 6111,3  | 11796,8    | 9101,1  | 18432,5    | 14220,5  |
|   | 5   | 5032,4     | 3871,4  | 8650,8     | 6655,1  | 12883,0    | 9910,9  | 20129,7    | 15485,8  |
|   | 5,5 | 5457,0     | 4187,4  | 9380,7     | 7198,2  | 13970,0    | 10719,7 | 21828,1    | 16749,6  |
|   | 6   | 5882,0     | 4502,7  | 10111,2    | 7740,1  | 15057,8    | 11526,8 | 23527,8    | 18010,6  |
|   | 6,5 | 6307,2     | 4817,2  | 10842,1    | 8280,8  | 16146,4    | 12332,0 | 25228,8    | 19268,8  |
|   | 7   | 6732,7     | 5131,5  | 11573,6    | 8821,1  | 17235,8    | 13136,6 | 26930,9    | 20525,9  |
|   | 7,5 | 7158,5     | 5445,1  | 12305,6    | 9360,3  | 18325,9    | 13939,6 | 28634,2    | 21780,6  |
|   | 8   | 7584,6     | 5759,0  | 13038,1    | 9899,8  | 19416,7    | 14743,0 | 30338,5    | 23036,0  |
|   | 8,5 | 8011,1     | 6072,3  | 13771,1    | 10438,4 | 20508,3    | 15545,2 | 32044,2    | 24289,4  |
|   | 9   | 8437,8     | 6386,3  | 14504,7    | 10978,2 | 21600,8    | 16349,0 | 33751,2    | 25545,3  |
|   | 9,5 | 8864,9     | 6699,9  | 15238,9    | 11517,2 | 22694,1    | 17151,7 | 35459,6    | 26799,5  |
|   | 10  | 9292,1     | 7012,7  | 15973,3    | 12055,0 | 23787,9    | 17952,6 | 37168,6    | 28050,9  |
|   | 11  | 10147,7    | 7636,4  | 17444,0    | 13127,1 | 25978,1    | 19549,2 | 40590,7    | 30545,6  |
|   | 12  | 11004,5    | 8259,9  | 18917,0    | 14198,9 | 28171,6    | 21145,4 | 44018,2    | 33039,7  |
|   | 13  | 11862,5    | 8883,2  | 20391,8    | 15270,3 | 30368,0    | 22741,0 | 47450,0    | 35532,8  |
|   | 14  | 12721,7    | 9507,9  | 21868,8    | 16344,2 | 32567,6    | 24340,2 | 50886,9    | 38031,6  |
|   | 15  | 13582,3    | 10132,8 | 23348,1    | 17418,4 | 34770,6    | 25940,0 | 54329,0    | 40531,3  |
|   | 16  | 14443,9    | 10752,0 | 24829,2    | 18482,8 | 36976,3    | 27525,1 | 57775,4    | 43007,9  |
|   | 17  | 15306,9    | 11377,8 | 26312,7    | 19558,5 | 39185,6    | 29127,1 | 61227,6    | 45511,0  |
|   | 18  | 16171,1    | 11999,5 | 27798,3    | 20627,3 | 41397,9    | 30718,8 | 64684,3    | 47998,1  |
|   | 19  | 17036,4    | 12619,1 | 29285,8    | 21692,4 | 43613,2    | 32304,9 | 68145,6    | 50476,4  |
|   | 20  | 17903,2    | 13244,1 | 30775,9    | 22766,8 | 45832,2    | 33904,9 | 71612,9    | 52976,4  |
|   | 21  | 18771,1    | 13868,8 | 32267,7    | 23840,6 | 48053,9    | 35504,0 | 75084,2    | 55475,0  |
|   | 22  | 19640,3    | 14492,7 | 33762,0    | 24913,2 | 50279,3    | 37101,4 | 78561,4    | 57971,0  |
|   | 23  | 20510,9    | 15116,1 | 35258,4    | 25984,7 | 52507,8    | 38697,1 | 82043,5    | 60464,2  |
|   | 24  | 21382,4    | 15738,7 | 36756,6    | 27055,0 | 54739,0    | 40291,1 | 85529,6    | 62954,8  |
|   | 25  | 22255,7    | 16360,7 | 38257,8    | 28124,2 | 56974,6    | 41883,4 | 89022,8    | 65442,8  |
|   | 26  | 23129,9    | 16983,3 | 39760,5    | 29194,5 | 59212,5    | 43477,3 | 92519,5    | 67933,2  |
|   | 27  | 24005,5    | 17608,7 | 41265,7    | 30269,6 | 61454,1    | 45078,3 | 96022,0    | 70434,9  |
|   | 28  | 24882,4    | 18233,8 | 42773,1    | 31344,1 | 63698,9    | 46678,5 | 99529,5    | 72935,2  |
|   | 29  | 25760,4    | 18858,5 | 44282,4    | 32418,0 | 65946,5    | 48277,8 | 103041,4   | 75434,1  |
|   | 30  | 26639,6    | 19482,9 | 45793,8    | 33491,4 | 68197,3    | 49876,3 | 106558,3   | 77931,7  |
|   | 32  | 28402,2    | 20733,9 | 48823,7    | 35641,9 | 72709,6    | 53078,8 | 113608,7   | 82935,6  |
|   | 34  | 30170,0    | 21992,3 | 51862,6    | 37805,1 | 77235,1    | 56300,4 | 120679,9   | 87969,3  |
|   | 36  | 31943,1    | 23250,7 | 54910,5    | 39968,3 | 81774,2    | 59521,9 | 127772,2   | 93003,0  |
|   | 38  | 33721,0    | 24511,4 | 57966,8    | 42135,4 | 86325,8    | 62749,2 | 134884,1   | 98045,6  |
|   | 40  | 35490,0    | 25775,5 | 61007,7    | 44308,3 | 90854,4    | 65985,2 | 141960,0   | 103101,8 |

<sup>1)</sup>Please observe the pressure-/temperature rating



Series 455

Coefficient of discharge  $\alpha_w$  i.e.  $K_{dr}$  as a function of the relation between the pressures  $p_{a0}/p_0$  of vapours and gases

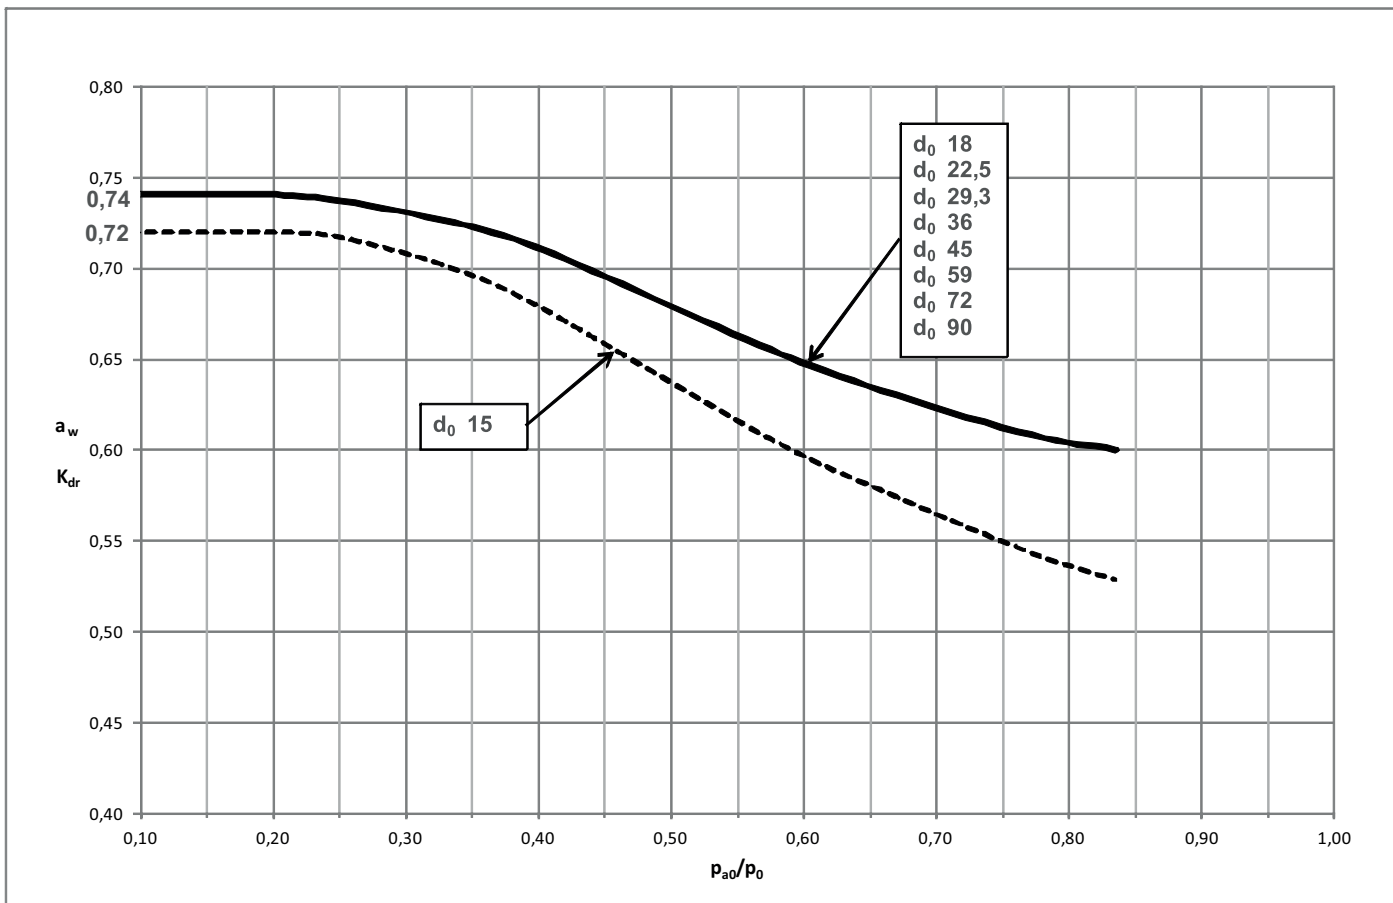

$$\frac{p_{a0}}{p_0} = \frac{\text{counter pressure bar(a)}}{\text{blow-off pressure bar(a)}} \quad p_{atm} = \text{ambient i.e. atmospheric pressure} = 1,01325 \text{ bar(a)}$$

Example to determine the coefficient of discharge  $\alpha_w$  i.e.  $K_{dr}$  in relation to the set-pressure  $p_{set}$

| Set-pressure     | Blow-off pressure                     |
|------------------|---------------------------------------|
| $p_{set}$ bar(g) | $p_0$ bar(a)                          |
| $\leq 1$         | $p_{set} + p_{atm} + 0,1 \text{ bar}$ |
| $> 1$            | $p_{set} \times 1,1 + p_{atm}$        |

For DN50 ( $d_0=45 \text{ mm}$ ), safety valve set at  $= 0,3 \text{ bar(g)}$  and blowing-off into the environment the blow-off pressure is determined as follows:

|                            |         |        |
|----------------------------|---------|--------|
| Set-pressure               | 0,3     | bar(g) |
| + Atmospheric pressure     | 1,01325 | bar(a) |
| + permissible overpressure | 0,1     | bar(g) |
| ~ Blow-off pressure        | 1,41    | bar(a) |

Consequently:


$$\frac{p_{a0}}{p_0} = \frac{1,01325 \text{ bar(a)}}{1,41 \text{ bar(a)}} = 0,72 \quad \text{and extracted from the chart} \quad \alpha_w \text{ i.e. } K_{dr} = 0,62$$

Units:

bar(a)  $\hat{=}$  absolute pressure - pressure in relation to absolute vacuum (zero), e.g.  $p_{atm} = 1,01325 \text{ bar(a)}$

bar(g)  $\hat{=}$  overpressure - pressure above i.e. in relation to  $p_{atm} = 1,01325 \text{ bar(a)}$

Coefficient of discharge  $\alpha_w$  i.e.  $K_{dr}$  as a function of the ratio of stroke / flow diameter  $h/d_0$  of vapours and gases

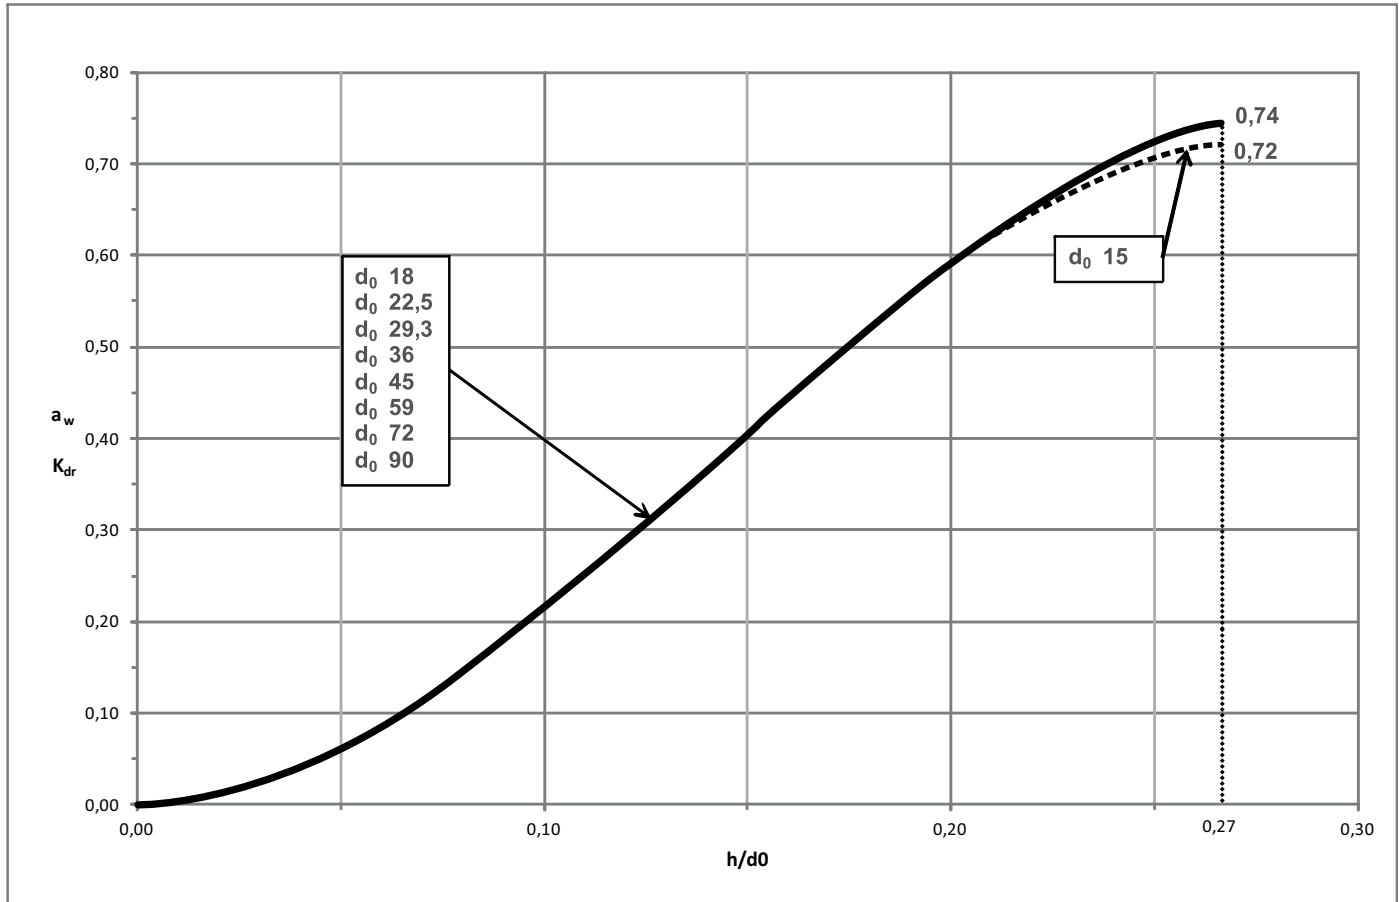

If the capacity of the respective nominal diameter is too high, the minimum necessary stroke can be determined with the required coefficient of discharge  $\alpha_w$  bzw.  $K_{dr}$ .

The required discharge coefficient  $\alpha_w / K_{dr}$  must be specified to determine the necessary stroke limitation.

### Pressure-/ temperature rating

PN 40 | Material: 1.4408

