

DP971F

DN65 – DN150

ProBalance

PN16

Features & Benefits

- A high performing differential pressure control valve that can be fitted in the supply or return pipework, regulating both differential pressure and flow rate.
- Differential pressure activation range (DP Range) from 15 to 150 kPa
- Integrated valve position indicator for visual inspection
- Tested in accordance with the BSRIA guidance standard

Materials

PART	MATERIAL
Body	Cast Iron ASTM A48-CL30
Seat	Cast Bronze ASTM B584-C836
Cone	Cast Bronze ASTM B584-C836
Guide	Cast Bronze ASTM B584-C836
Gasket	Non Asbestos
Top Flange	Cast Iron ASTM A48-CL30
Packing	EPDM
Yoke	Ductile Iron ASTM A536-65-45-12
Diaphragm plate	ASTM A240-304
Spring	Spring Steel
Adjust Screw	B16-C36000 (Brass)
Actuator Spindle	Stainless Steel 304
Diaphragm Case	DI (A536-65-45-12)
Diaphragm	EPDM
Cone Stem	Stainless Steel 316
Cover Bolt	Steel to JIS3101

Dimensions, Coefficients & Weights


SIZE (mm)	WEIGHT (kg)	A (mm)	B (mm)	C (mm)	F/O Kv
65	48	276	115	720	55.4
80	56	298	120	720	72.7
100	72	352	130	735	129.8
125	130	400	150	775	173
150	162	451	180	800	249.1



DP971F

BALANCING VALVES

Dimensional Drawing

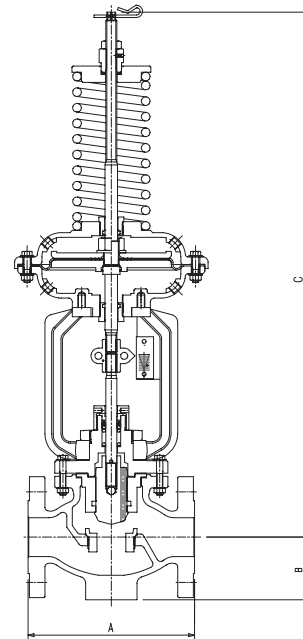

Pressure/Temperature Ratings

TEMPERATURE (°C)	-10 to 120°C
PRESSURE (BAR)	16

PRESSURE RATING: PN16

END CONNECTIONS: BS EN1092-2 PN16

OPERATOR: Actuator

INCLUDED WITH VALVE: 1 x Impulse tube kit (which contains two sets of; Copper tube, ball valve, tee piece, flare nut, flare nipple, nipple, long nipple and pressure gauge)

SPECIFICATION: - Valve shell tested and inspected in accordance with BS EN 12266-1
- Face-to-face in accordance with EN 58 Series 1 or 37

OTHER: Valve comes factory set at 70 kPa

SIZING: Please contact our technical support helpline for guidance

SPARES: Impulse tube kit (Part No. 0JG91983D)

Valid as of 230418

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Crane Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.